

RUC: 20455256357

COT.

A-01253

Atendiendo su amable solicitud estamos enviando cotización de los productos requeridos, para nosotros es un placer poner nuestra compañía a su servicio.

TELE FONO	RPC / RPM		FECHA	CIUDAD
-	959354677 - #999033365		05-abr-2016	-
				T. PAGO
				-

ITEM	DESCRIPCION	CANTIDAD	UNID	PRECIO.UNIT	TOTAL
1	Camara Domo PTZ HDVI HK-DS2DE7186-A	1	UNID	S/. 3.980	S/. 3.980

					TOTAL	S/. 3.980
					VALOR TOTAL	S/. 3.980

ATENTAMENTE
Percy Guerrero
RPM # 999033365 RPC: 959354677

CONDICION DE COMPRA

- Los Precios están expresados en Moneda Soles
- Validez de la Propuesta: 30 días o hasta agotar stock"

GARANTIA DEL PRODUCTO

- GARANTIA DE 1 AÑO

FORMA DE PAGO

PLAZO DE ENTREGA

- Entrega Inmediata o dentro de 24 a 48 horas

FORMAS DE PAGO

- EN CASO DE ENTIDADES PUBLICAS EL PAGO ES DESPUES DE LA ADQUISICION EN LOS ALMACENES DE LA INSTITUCION

- EN CASO DE EMPRESA PRIVADA

Opcion1: (Envio courier gratis): previo depósito de la totalidad a las cuentas del banco (envio gratis) a la cuenta corriente bcp soles

Opcion2: (Entrega en nuestras oficinas):

Solicitar la direccion mas cercana a su residencia al rpm #999033365 rpc: 959354677, estamos ubicados en - (Distritos de surco, javier prado y wilson) , arequipa, trujillo, otros departamentos

Opcion3: Para Entidades del Estado : Pago despues de la Entrega"

DIRECCIONES

-

Dirección Principal : Av Manuel Olguin 335 - Santiago de Surco

-

Direcciones en Arequipa -Trujillo -Chiclayo -Tacna -Cusco -Moquegua -Cajamrca -Ica -Piura -Tumbes -Loreto

AREQUIPA

Calle Rivero 107 oficina 302g

CUENTAS DEL BANCO

Cuenta Corriente BCP Soles: INTEGRASAT SOLUCIONES CENTER S.R.L

215-2050250-0-12

Cuenta Corriente BCP DOLARES : INTEGRASAT SOLUCIONES CENTER S.R.L

215-2131402-1-39

-

.."

TELEFONOS Y RAZON SOCIAL

TELF. -: - TELF. PROVINCIAS : 054-696980

RPM #999033365 RPC: 959354677

RAZON SOCIAL

Razón Social: INTEGRASAT SOLUCIONES CENTER S.R.L

RUC: 20455256357



Key features

IR function:

- 0 Lux minimum illumination
- Up to 120m IR distance
- IR light MTBF reaching up to 30,000 hours

System function:

- 1/3" high performance CMOS, up to 1280x720 resolution
- $\pm 0.1^\circ$ Preset Accuracy
- Self-adaptive to HIKVISION, Pelco-P/D protocol
- 3D intelligent positioning function
- Power-off memory function: restore PTZ & Lens status after reboot
- Built-in temperature sensor, with display of internal temperature
- Lightning protection, surge protection and voltage transient protection
- IP66 standard
- RS-485 communication diagnosis
- Scheduled PTZ movement
- UTC(Jp the Coax) function

Camera function:

- Auto focus, auto white balance, backlight compensation and auto/manual day & night switch
- Privacy masks programmable
- 3D DNR, digital WDR

PTZ function:

- 360° endless pan range and -15°-90° tilt range
- 240°/s Pan Preset Speed and 200°/s Tilt Preset Speed
- 0.1°-160°/s Manual Pan Speed and 0.1°-120°/s Manual Tilt Speed
- 256 presets programmable; preset image freezing capability
- 8 patrols, up to 32 presets per patrol



- 4 patterns, with the total recording time not less than 10 minutes
- Proportional zoom function
- Park action: auto call up of PTZ movement, after a defined time of inactivity

Application Scenarios

It can be widely applied to places requiring wide-area monitoring display, such as rivers, forests, highways, railways, airports, ports, sentries, squares, parks, scenic sites, streets, stations, large venues, outside of residential areas, etc., and the auto tracking function can be applied to the perimeter protection scenes, e.g., the perimeter of airport, harbor, and residential community.


Specifications

Parameter		Model
		DS-2AE7123TI-A: 24VAC, Outdoor
		E Series IR turbo HD720p PTZ Dome Camera
Camera	Image Sensor	1/3" CMOS
	Max. Image Resolution	1280×720
	Frame Rate	50Hz:25fps(1280×720), 50fps (1283×720) 60Hz:30fps(1280×720), 60fps (1283×720)
	Min. Illumination	Color: 0.02Lux@(F1.6,AGC ON) B/W: 0.002Lux@(F1.5,AGC ON) 0 lux with IR
	White Balance	Auto / Manual / ATW / Indoor / Outdoor
	AGC	Auto / Manual
	S / N Ratio	≥ 50dB
	3D DNR	Support
	Backlight Compensation	Support
	WDR	Digital WDR
	Shutter Time	PAL: 1~1/10,000s NTSC: 1~1/10,000s
	Day & Night	IR Cut Filter
	Digital Zoom	16x
	Privacy Mask	8 privacy masks programmable; a maximum of 8 zones can be masked simultaneously on the same video screen
	Focus Model	Auto / Semiautomatic / Manual
Lens	Focal Length	4~92mm, 23X
	Zoom Speed	Approx 3.0s(Optical Wide-Tele)
	Angle of View	58~1.7 degree(Wide-Tele)
	Min. Working Distance	10~1500mm (Wide-Tele)
	Aperture	F1.6~F4.4
Pan and Tilt	Pan Range	360° endless
	Pan Speed	Pan Manual Speed: 0.1~160°/s,



		Pan Preset Speed: 240°/s
	Tilt Range	-15°-90° (Auto Flip)
	Tilt Speed	Tilt Manual Speed: 0.1°-120°/s, Tilt Preset Speed: 200°/s
	Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
	Number of Preset	256
	Patrol	8 patrols, up to 32 presets per patrol
	Pattern	4 patterns, with the total recording time not less than 10 minutes
	Power-off Memory	Support
	Park Action	Preset / Patrol / Pattern / Pan scan / Tilt scan / Frame Scan / Random scan / Panorama scan
	PTZ Position Display	On / Off
	Preset Freezing	Support
	Scheduled Task	Preset / Patrol / Pattern / Pan scan / Tilt scan / Frame Scan / Random scan / Panorama scan
	RS-485 communication diagnosis	Support
Infrared	IR Distance	120m
	IR Intensity	Automatically adjusted, depending on the zoom ratio
Input/ Output	Monitor Output	1 turbo HD720p output 1.0V(p-p) / 75Ω, NTSC (or PAL) composite, BNC
	RS-485 Interface	Half-duplex mode Self-adaptive HIKVISION, Pelco-P, Pelco-D protocol
	UTC function	HIKVISION_C *Need UTC controller if DVR don't support UTC function
General	Menu Language	English, Chinese
	Power	24VAC(for -A model) Max. 30W(IR: 9W, Heater: 6W)
	Working Temperature / Humidity	-30 °C-65°C(-22°F-149°F) 90% or less
	Protection Level	IP66 standard TVS 4,000V lightning protection, surge protection and voltage transient protection
	Mounting	Various mounting modes optional
	Dimensions	Φ220×353.4mm (Φ8.66"×13.91")
	Weight (approx.)	4.5kg(9.92 lbs)
	Mount Option (only suitable for outdoor dome)	Long-arm wall mount: DS-1601ZJ; Corner mount: DS-1601ZJ-corner; Pole Mount: DS-1601ZJ-pole; Power box mount: DS-1601ZJ-box

Dimensions

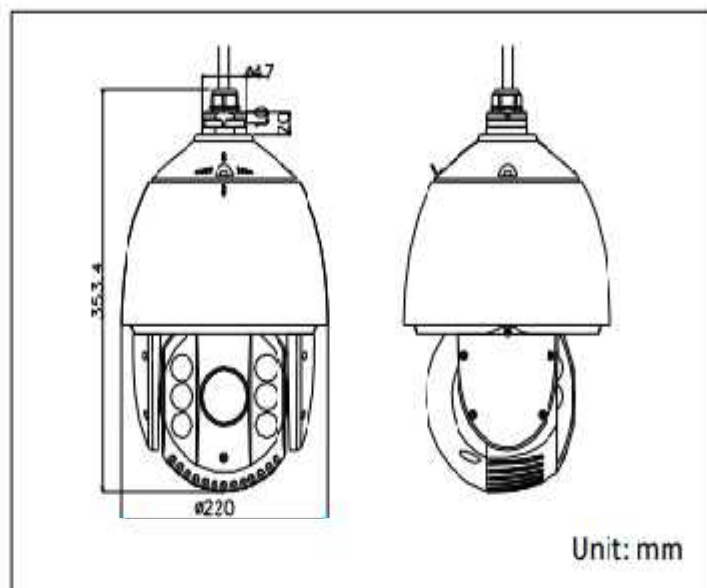

Order models

- DS-2AE713CTI-A, 24VAC, outdoor

Accessories



DS-1601ZJ Long-arm Wall Mount Bracket